


**Best Seller**

2~8/-10~-26°C/-40°C  
Combined Refrigerator and Freezer

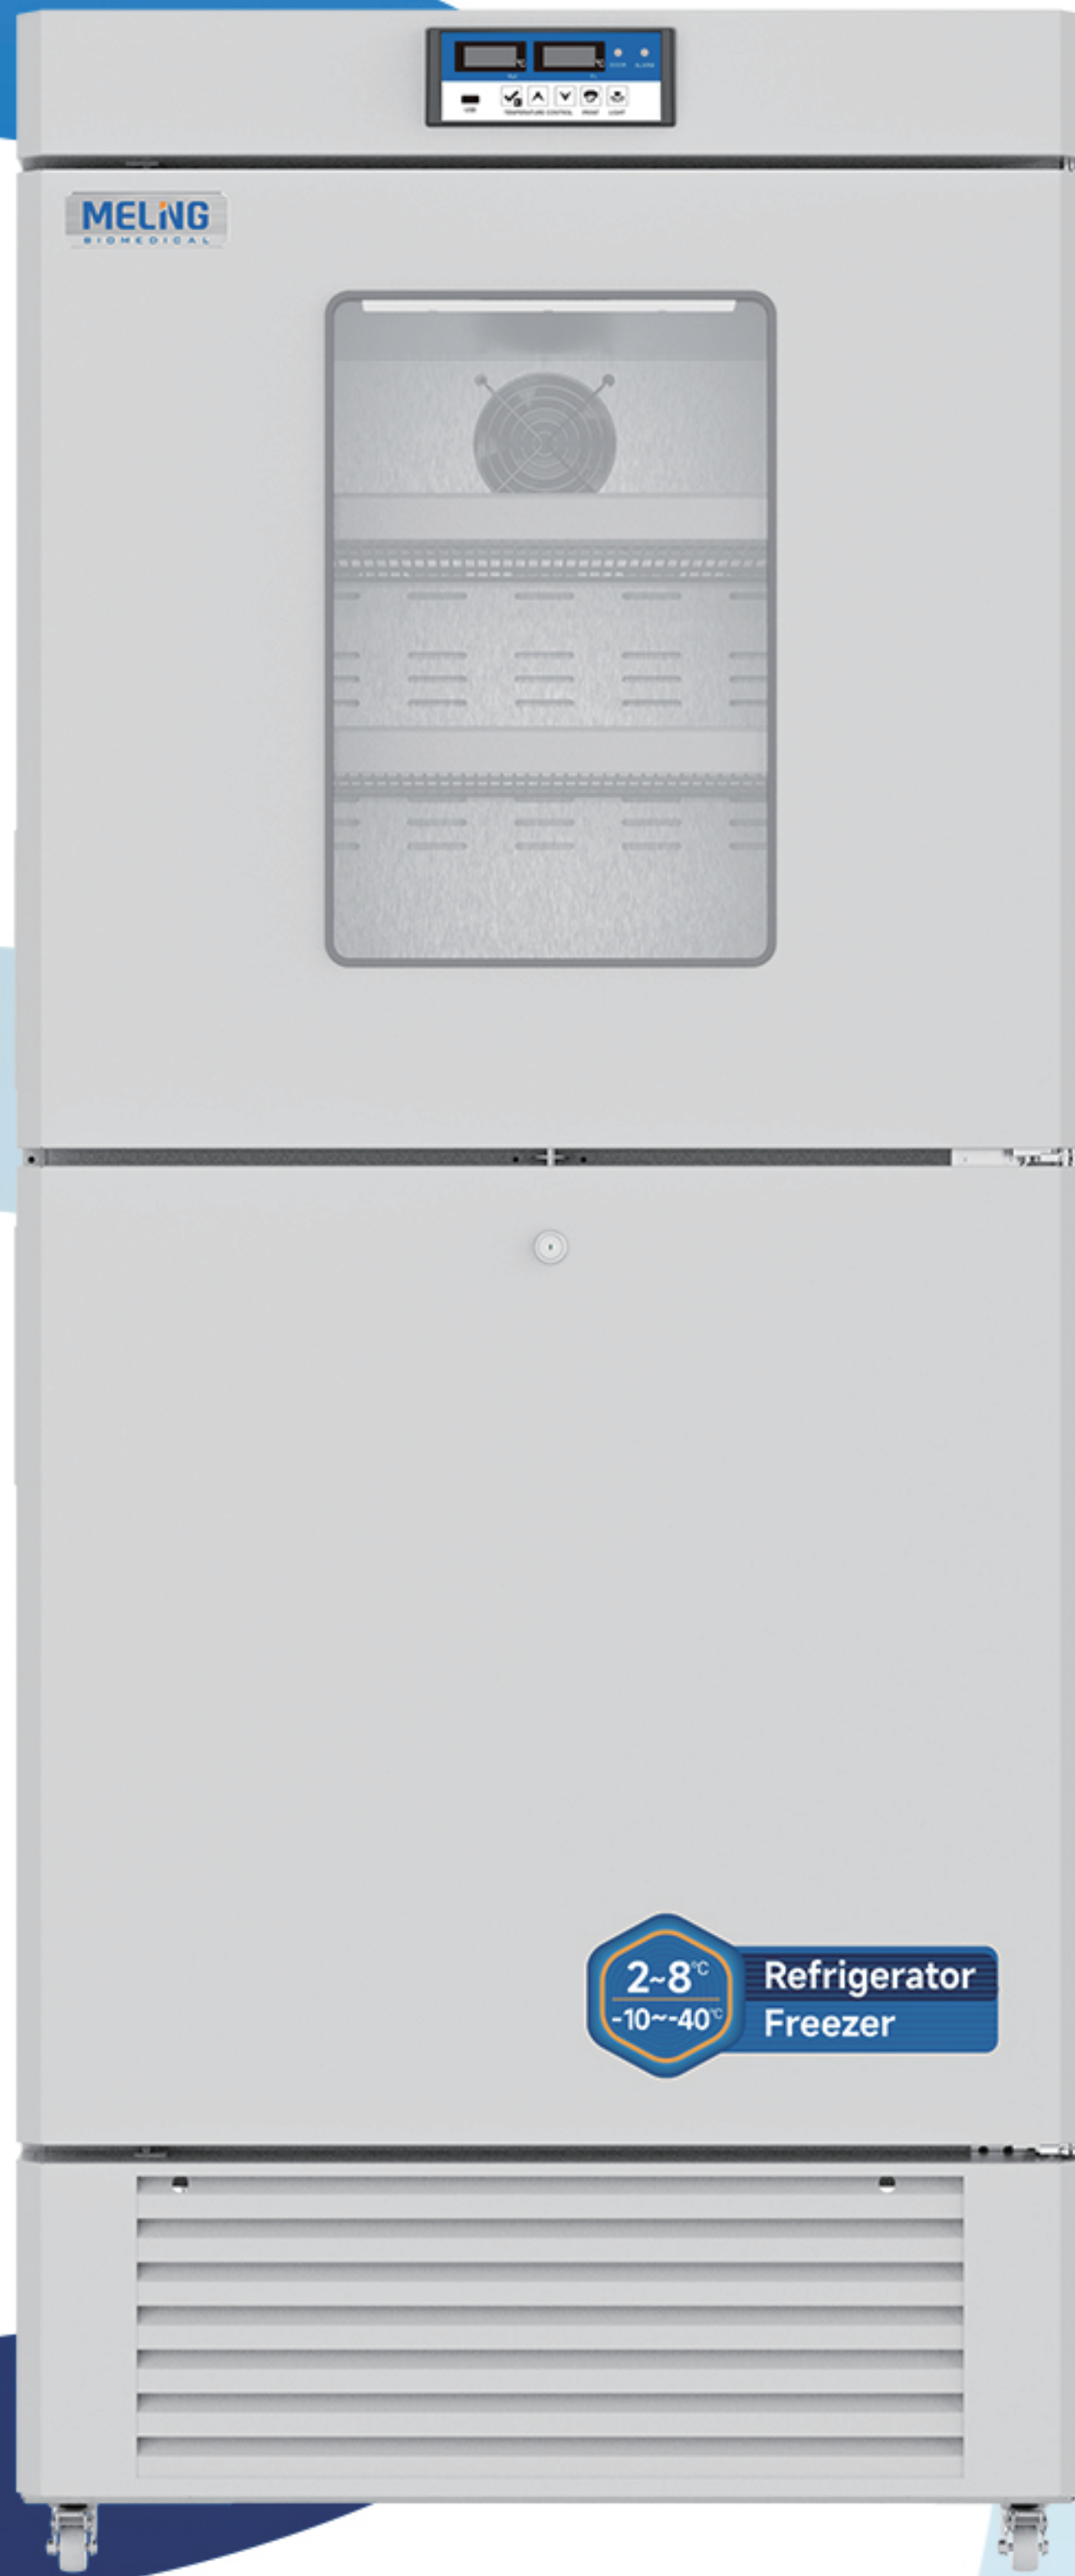

**YCD-FL289**

Brand/New Appearance  
Separate Control of Refrigeration and Freezing



Temp. fluctuation



Pulling down to LC5/LD-23°C



Temp. recovery after door opened for 1 min

\*Typical freezer data based on internal testing with freezer set point at 5/-23°C and ambient temperature at 22°C.

**Features**



2 independent compressors



Temperature control system  
Display temp. in 0.1°C increments



Built-in data logger  
Store up to 100,000 groups of temperature data



CE certificate



Upper chamber with double-pane glass




Alarms system  
Multiple alarm functions

**Structure**



## Dimensions

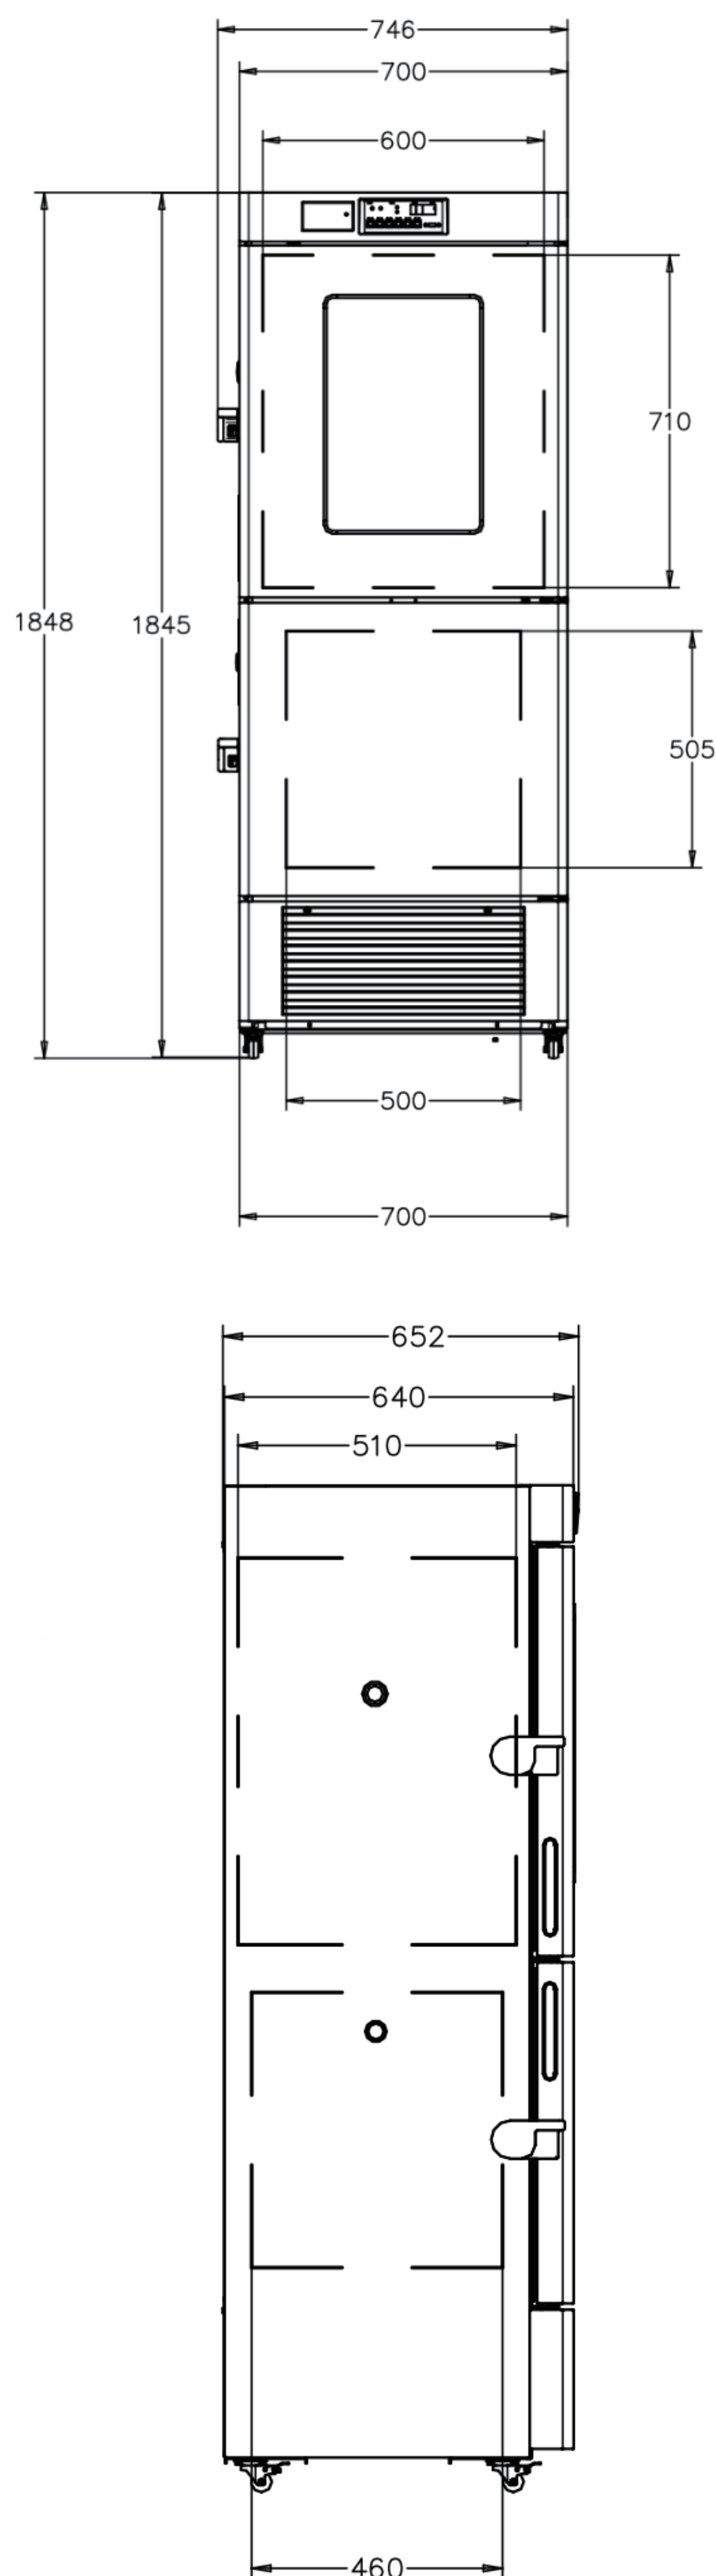

## Specification

### 2~8°C/-10~-26°C/-40°C Combined Refrigerator And Freezer

Model	YCD-FL289		
Capacity	289L/10.2 Cu.Ft		
Upper Chamber	189L/6.67 Cu.Ft		
Lower Chamber	100L/3.53 Cu.Ft		
Internal Size (W*D*H) mm/Inch	R: 600*510*710/23.62*20.08*27.95 F: 500*460*505/19.69*18.11*19.88		
External Size (W*D*H) mm/Inch	700*640*1845/27.56*25.2*72.64		
Package Size (W*D*H) mm/Inch	830*756*2004/32.68*29.76*78.9		
NW/GW (kgs)	143/165		
<b>Performance</b>			
Temperature Range	R:2~8°C F:-10~-40°C		
Ambient Temperature	16~32°C		
Cooling Performance	R:5°C F:-40°C		
Climate Class	N		
Controller	Microprocessor		
Display	Digital Display		
<b>Refrigeration</b>			
Compressor	2pc		
Cooling Method	Direct Cooling		
Defrost Mode	R:Automatic F:Manual		
Refrigerant	R600a; R290 R134a; R290(110V/60HZ)		
Insulation Thickness(mm)	D:R:67 F:90, L/R:R:50 F:100, B:R:50 F:100		
<b>Construction</b>			
External Material	Cold-roll Steel Sheets		
Inner Material	Stainless Steel		
Shelves	R:3 (Stainless Steel)+1(ABS), F:3(ABS)		
Access Test Port	2pc. Ø 25 mm		
Casters	4+(2 brakes)		
Data Logging/ Interval /Recording Time	USB/Record every 10 minutes/100,000 data		
Interface	Remote Alarm Contact, RS485		
Backup Battery	Yes		
<b>Alarms</b>			
Temperature	High/Low Temperature, High Ambient Temperature		
Electrical	Power Failure, Low Battery		
System	Sensor Error, Data Logger Failure, Data Communication Failure, Door Ajar,		
<b>Electrical</b>			
Power Supply(V/Hz)	110V/60Hz	220-240V;50Hz	220-240V;60Hz
Rated Current(A)	5.52A	2.5A	3.01A